

Typical Device Performance (25°C)


	Unit	Typical Value
Optical		
CW Output Power	W	15
Center Wavelength	nm	638, ± 10
Electrical		
Threshold Current	A	0.2
Operating Current	A	0.8
Operating Voltage	V	60
Power supply mode*		3 channels
Fiber		
Fiber Core Diameter	μm	400
Fiber Cladding Diameter	μm	440
Fiber Buffer Diameter	μm	700
Numerical Aperture	-	0.22
Fiber Length	m	1~5

*3 groups of LD assembled inside the module, 0.8A current and 50v voltage operating of each group.


Absolute Ratings

	Unit	Min	Max
Operating Temperature	°C	10	40
Operating Relative Humidity	%	-	75
Storage Temperature	°C	-20	80
Storage Relative Humidity	%	-	90
Lead Soldering Temperature, 10 s max	°C	-	250

Package Dimensions (mm)

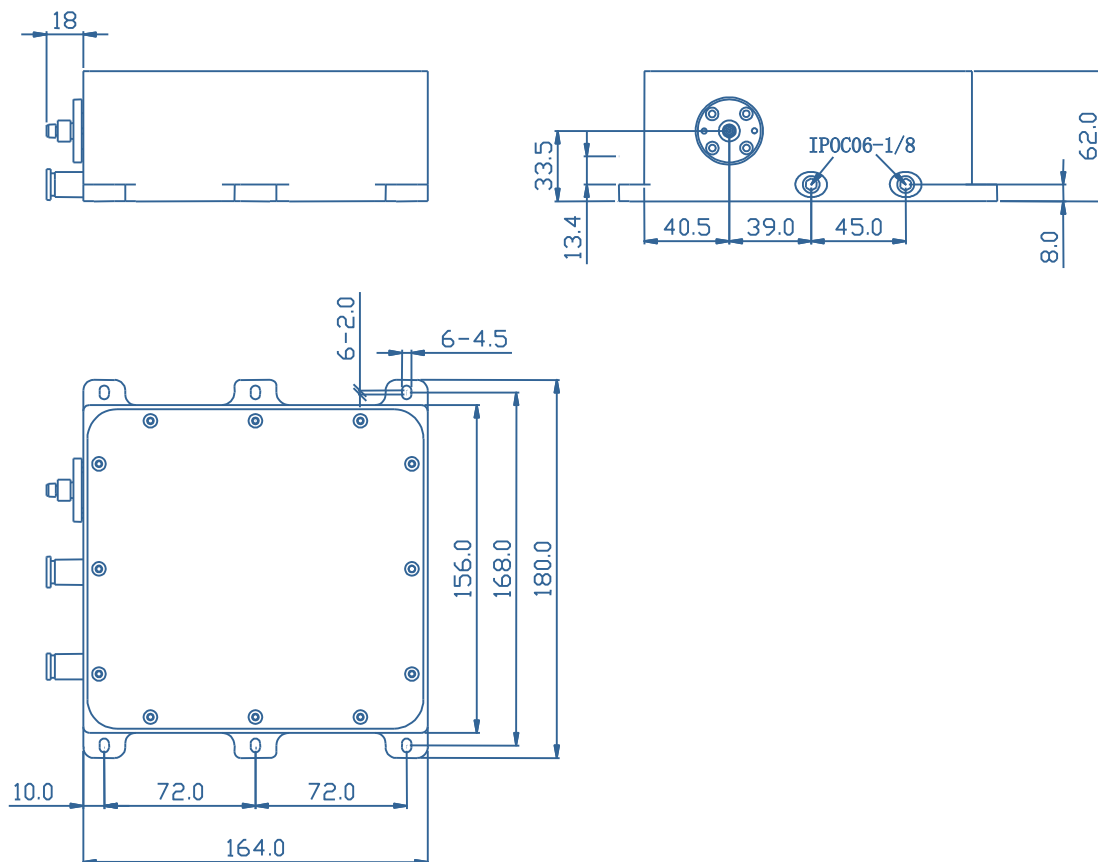

Type Definition

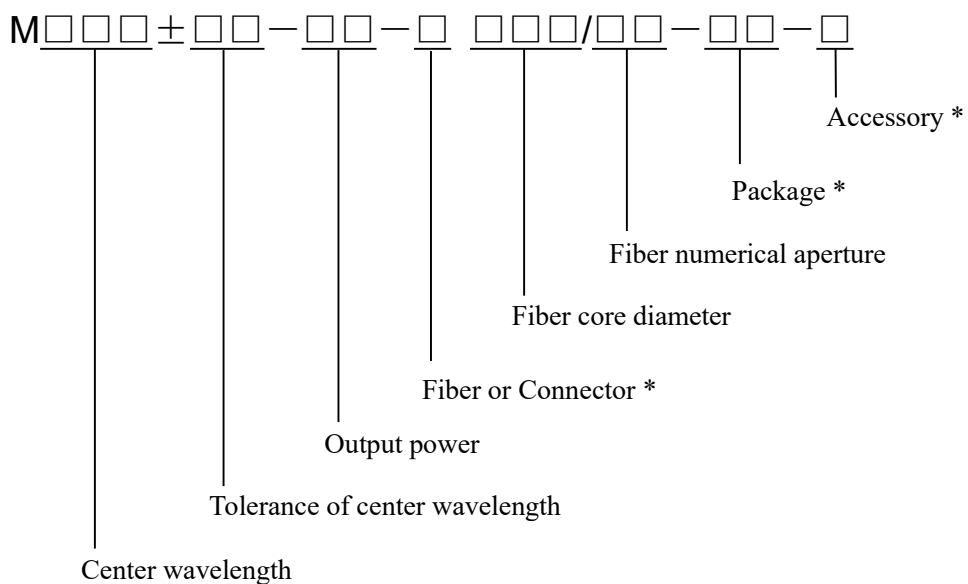

* Accessory: T – TE cooler, A – Aiming laser, P – Monitor photodiode, K – Fiber connector detector

* Fiber or Connector: F – Fiber output, D – Detachable connector

