

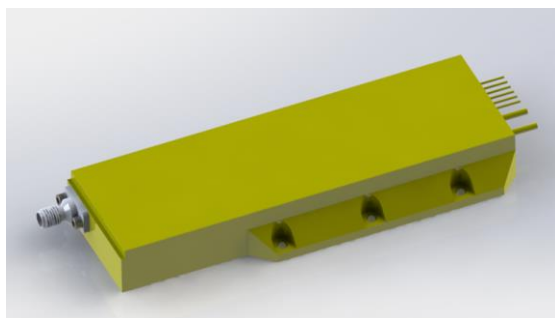


C-Series High Power Laser Diode Module

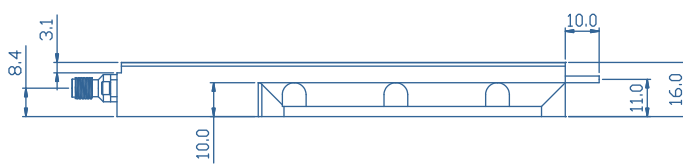


- Features**
- ◆ High output power of 120 W
 - ◆ 200μm/0.22NA multimode optical fiber
 - ◆ Center wavelength 878.5±0.5nm
- Applications**
- ◆ Fiber laser pumping
 - ◆ Direct diode laser applications

Package Dimensions (mm)



Pin-Out Assignment	
Pin	Function
1	LD (-)
2	LD (+)
3	-
4	-
5	PD (N)
6	PD (P)
7	Thermistor
8	Thermistor

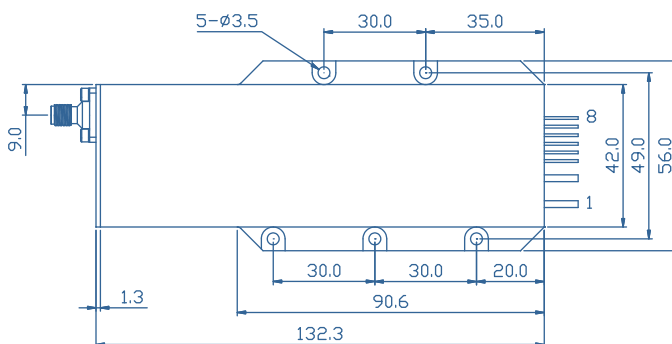

Typical Device Performance (25℃)

	Min	Typical	Max	Unit
Optical				
CW Output Power	-	120	-	W
Center Wavelength	-	878.5±0.5	-	nm
Spectral Width (FWHM)	-	<0.5	-	nm
Wavelength Shift with Temperature	-	0.02	-	nm / °C
Wavelength Shift with Current	-	0.05	-	nm / A
Feedback Protection (1030-1100nm)	-	>40	-	dB
Electrical				
Threshold Current	-	1.5	-	A
Operating Current	-	11.8	13	A
Operating Voltage	-	21.1	24	V
Slope Efficiency	-	11.8	-	W / A
Power Conversion Efficiency	43	48	-	%
Fiber*				
Fiber Core Diameter	-	200	-	μm
Fiber Cladding Diameter	-	220	-	μm
Fiber Buffer Diameter	-	500	-	μm
Numerical Aperture	-	0.22	-	-
Fiber Length	-	1-5	-	m
Fiber Connector	-	-	-	-

* Customized fiber and connector available.

Absolute Ratings

	Min	Max	Unit
Operating Temperature	10	40	℃
Operating Relative Humidity	-	75	%
Cooling Mode	-	Water cooling (25℃)	-
Storage Temperature	-20	80	℃
Storage Relative Humidity	-	90	%
Lead Soldering Temperature(10 s max)	-	250	℃