

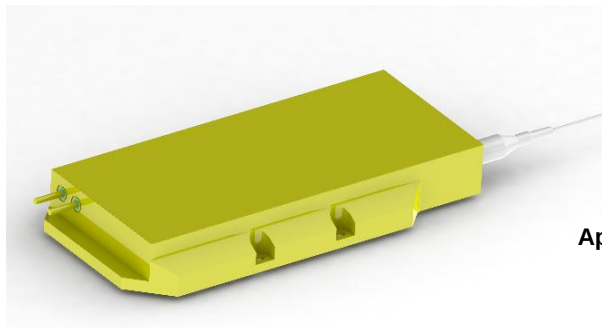
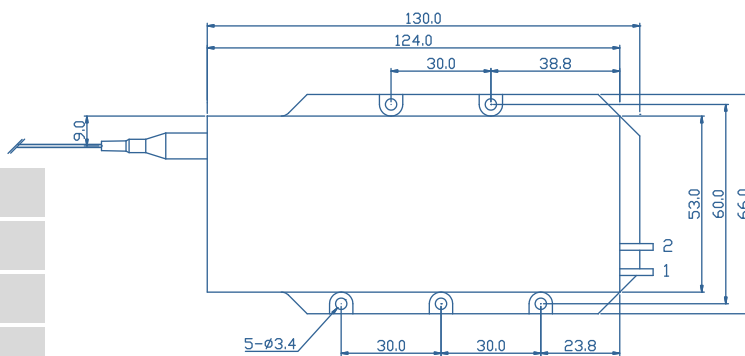


D-Series High Power Laser Diode Module

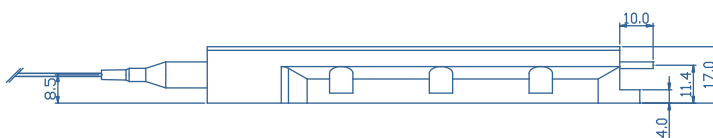

- Features**
- ◆ High output power of 260 W
 - ◆ 135μm/0.22NA multimode optical fiber
 - ◆ Center wavelength 976±3nm
- Applications**
- ◆ Fiber laser pumping
 - ◆ Material processing

Package Dimensions (mm)



Pin-out Assignment	
Pin	Function
1	LD (+)
2	LD (-)

Typical Device Performance (25℃)

	Min	Typical	Max	Unit
Optical				
CW Output Power	-	260	-	W
Center Wavelength	-	976±3	-	nm
Spectral Width (90% of Power)	-	<6.0	-	nm
Wavelength Shift with Temperature	-	0.3	-	nm /℃
Feedback Protection (1030-1100nm)	-	>40	-	dB
Power within 0.18 NA	-	95%	-	-
Electrical				
Threshold Current	-	1	-	A
Operating Current	-	18.2	20	A
Operating Voltage	-	27.5	32	V
Slope Efficiency	-	15	-	W / A
Power Conversion Efficiency	45	50	-	%
Fiber*				
Fiber Core Diameter	-	135	-	μm
Fiber Cladding Diameter	-	155	-	μm
Fiber Buffer Diameter	-	300	-	μm
Numerical Aperture	-	0.22	-	-
Fiber Length	-	1-5	-	m
Fiber Connector	-	-	-	-

* Customized fiber and connector available.

Absolute Ratings

	Min	Max	Unit
Operating Temperature	10	40	℃
Operating Relative Humidity	-	75	%
Cooling Mode	-	Water cooling (25℃)	-
Storage Temperature	-20	80	℃
Storage Relative Humidity	-	90	%
Lead Soldering Temperature (10 s max)	-	250	℃