

Type : DD532-15-5

Main Technical Parameters:

Size : $\Phi 20\text{mm} \times 59\text{mm}$

Circuit board : $35\text{mm} \times 35\text{mm}$

Wavelength : 532nm

Operating voltage : DC 5V

Operating current : $\leq 450\text{mA}$

Divergence : 0.5mrad

Output aperture : $\Phi 5\text{mm}$

Output power : 15mW

Operating distance : 50m

Optics : glass lens both sides AR coated

Crystal : Nd : YVO4 and KTP

Beam Mode : TEM₀₀ , continuous output

Wire length : 2 \times 250mm(or connector wire and plugs)


Operating temperature : 15 $^{\circ}\text{C}$ ~ 30 $^{\circ}\text{C}$

Warm-up time : <15 mins

Stability : < $\pm 20\%$ @ 15 $^{\circ}\text{C}$ ~ 30 $^{\circ}\text{C}$

Life time : ≥ 5000 hours

Accessories choose and buy : LPS-4 power supply

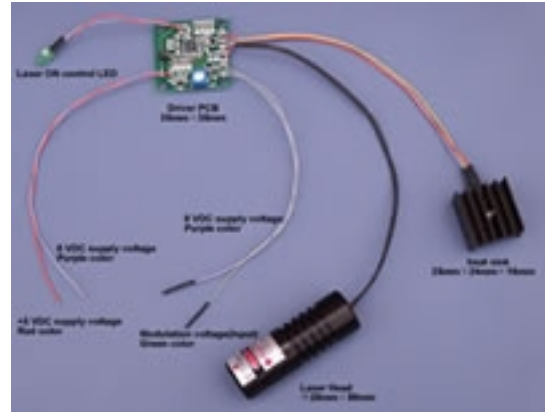

Press for large image

